


MEKO

Rack-driven motor for sliding gates up to 800 kg, residential settings.

230V - 115V - 24V

Slim elegant design, silent movement.
Noble metal gears, bronze transmission shaft.
Adjustable ground plate (horizontally and vertically).
Key-lock release system, protected by an encrypted key.
Embedded control board featuring obstacle detection and plug-in radio receiver.
Ideal solution for residential, industrial and apartment block settings.
The 24V range can operate in emergency mode during power outages by back-up batteries.

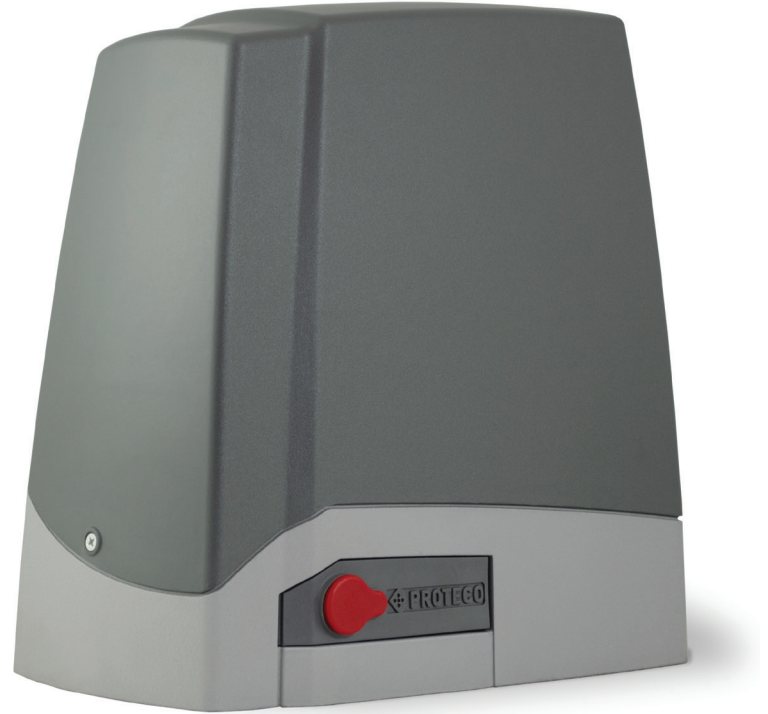

Sliding Gate Automation




MEKO

THE RANGE

	Power supply	Limit switch	Leaf
MEKO 5	230V-115V	mechanical	500 Kg
MEKO 6	24V	mechanical	600 Kg
MEKO 8	230V-115V	mechanical	800 Kg

DIMENSIONS

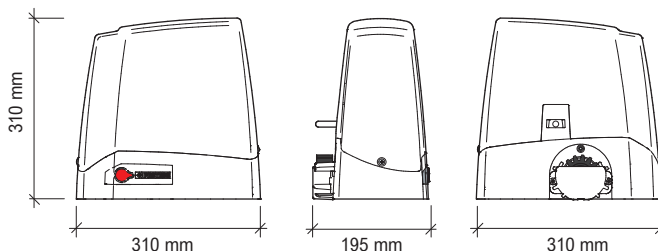

KIT CONTENT



MEKO
Rack-driven gear motor with
embedded control board,
433,92 Mhz radio receiver



LUCE
LED 24V
flashing light



ANT02
Aerial
433,92 Mhz



ANGIE
Pair of 4-ch
remote controls



RF40
Photocell
set



B120
Nylon coated
rack - 4 m

TECHNICAL FEATURES

	MEKO 5	MEKO 6	MEKO 8	MEKO 5 115	MEKO 8 115
Power supply	230V ~ 50Hz	24V dc	230V ~ 50Hz	115V ~ 60Hz	115V ~ 60Hz
Current	1.2 - 1.7A	0.7 - 10A	1.2 - 2A	2.0 - 2.3A	2.8 - 3.2A
Motor power	250 W	80 W	300 W	280 W	330 W
Capacitor	10 µF	-	10 µF	30 µF	30 µF
Thermic protection	150°C	-	150°C	150°C	150°C
Max thrust	350 N	400 N	440 N	380N	460 N
IP class protection	44	44	44	44	44
Revolution speed	1400 rpm	1600 rpm	1400 rpm	1700 rpm	1700 rpm
Opening speed	10,5 m/min	6 - 11 m/min	10,5 m/min	12 m/min	12 m/min
Max gate weight	500 Kg	600 Kg	800 Kg	500 Kg	800 Kg
Duty cyle	40%	80%	40%	40%	40%

INSTALLATION MAP

- 1_Flashing light
- 2_Outstanding antenna
- 3_Gear motor complete with control board and radio receiver
- 4_Key switch
- 5_Outer photocell
- 6_Inner photocell
- 7_Safety strip
- 8_Phocell posts
- 9_Rack



Made in Italy

www.proteco.net



Via Neive,77 - 12050 CASTAGNITO (CN) ITALY
Tel. +39 0173 210111 Fax +39 0173 210199
info@proteco.net